



NEXLER Dysperbit

Dispersive asphalt-rubber compound

TECHNICAL DATA

Coat formation time:	≤ 6 hours
Time interval between applying following layers:	approx. 5 hours
Resistance to rain:	after approx. 5 hours
Backfilling the excavation:	after 3 days
Water content:	not more than 60%
Dilution capacity of mass in water:	not less than 200%
Vertical flowability of the coating, within 5 h at temperature of 100°C:	does not drain
Flexibility when bending on a Ø 30 mm roller at temperature -10°C:	no scratches or cracks
Permeability of coating at 1000 mm water column in 48 h:	resistant
Consumption:	
- priming mineral and bituminous substrates	0,2 kg/m ²
- priming mineral wool:	min. 0,8 kg/m ²
- renovation and maintenance of roof coverings:	0,5 kg/m ² /layer
- damp proofing:	1,5 kg/m ² /mm - thickness of a dry layer min. 1 mm
Substrate and ambient temperature during application:	from +5°C to +30°C
Reference documents:	PN-B-24000

PROPERTIES

- Has very good adhesion to mineral substrates and roofing felt
- Can be applied both to dry and matt-damp substrates
- Quick and easy to use
- Has thixotropic properties
- Solvent-free, safe in contact with polystyrene
- Resistant to weather conditions
- Resistant to flowing



APPLICATION

- Renovation and maintenance of roof coverings
- Damp proofing of underground elements of buildings and structures
- Priming of mineral substrates for proper bituminous insulation
- Priming mineral wool for asphalt felt insulation



PACKAGING

- Plastic buckets: 5 kg, 10 kg, 20 kg
- Quantity per pallet:
 - 5 kg - 100 pcs.
 - 10 kg - 55 pcs.
 - 20 kg - 33 pcs.

METHOD OF APPLICATION

▪ CONDITIONS OF USE

The temperature of the substrate and air during the works should be from +5°C to +30°C. Works should not be carried out during precipitation and strong sunlight. During the work, very good verification of the work area should be ensured.

▪ SUBSTRATE PREPARATION

For using on substrates such as: concrete/reinforced concrete, traditional plaster, cement or cement-lime plaster, cement underlays, stable, existing seamless waterproof coatings, unless they are made of tar-based soft-bitumen materials, stable, existing asphalt felt insulation.

The substrate intended for priming must be bound, dry or semi-dry, seasoned, load-bearing. The substrates should be cleaned mechanically; dust, any loose layers, sharp protruding edges and impurities that worsen adhesion should be removed. If there are cavities in the substrate, honeycombing, gravel pockets and other unevenness, the substrate should be levelled and repaired, the cavities should be filled. The substrate on which the product will be used must be continuous. Partitions made of small size elements should have an equal face, a full joint. If this condition is not met, a levelling plaster should be made.

Before applying the waterproofing material, mineral substrates (concrete, plasters) should be primed with **NEXLER Dysperbit** diluted with water in a 1:1 ratio. For materials with reduced absorption, hydrophobized, (e.g. "waterproof concrete"), use NEXLER BITFLEX Primer for priming.

Clean the existing bituminous substrates from loose impurities and peeling coatings. Ruptures, cavities in the felt, areas of leakage should be levelled or sealed with a roofing putty. Blisters on the felt should be cut and glued using a roofing putty. Repair any flashings. Examine and repair the fixing of other elements on the surface. Fix and repair elements of surface drainage.

▪ PRODUCT PREPARATION

Stir thoroughly before use, and repeat mixing from time to time during application.

When using the product as a primer, dilute it with water in a 1:1 ratio, mix thoroughly.

▪ APPLICATION METHOD

Substrate priming: Diluted **NEXLER Dysperbit** should be applied with of a paint brush or a roofing brush to a properly prepared surface.

Priming mineral wool slabs: Undiluted **NEXLER Dysperbit** should be applied with of a paint brush or a roofing brush to a surface made of mineral wool.

Maintenance of felt coverings: After filling in the defects and full drying of the compound, apply **NEXLER Dysperbit** to the whole surface of the roof covering in two layers, applying each after the previous one has dried. In areas where the roof slopes meets the chimney, at ducts and ventilation pipes etc. use reinforcement by embedding a reinforcing fabric and turning it up to the appropriate height. The last, still fresh layer, is recommended to be sprinkled with a mineral topping. That will allow for a significant extension of the life of the maintenance thus carried out.

Damp-proof coatings: It is recommended to apply the **NEXLER Dysperbit** to the primed surface. The total thickness of a dry layer should be at least 1 mm. The next layer can be applied after the previous one has fully dried. Apply material by hand, using a brush or a float. The freshly applied coating must be protected from strong sunlight (e.g. by shading), flooding, rain and negative temperatures. After complete bonding, the waterproof coating should be protected against mechanical damage associated with backfilling the excavation. There fore, it is recommended to use additional protection, if not in the form of waterproof thermal insulation boards, then PE, EPDM film or non-woven fabric. Dimpled foils should not be used to protect bituminous mass due to the fact that dimples, under soil pressure, may locally press on the coating and damage it. The exception being profiled films with an integrated filtering non-woven fabric. Do not allow rainwater to penetrate the partition and go under the waterproofing layer from the substrate side.

▪ CONTROL OF PERFORMANCE

When fresh, check the material consumption for the separated area on a regular basis. Additionally, it is recommended to measure the thickness of the freshly applied sealing layer with special control plates. The place of measurement must be puttied immediately. A properly made mass, after drying, should constitute a uniform, clean coating, free from flaking and other defects. The coating should adhere tightly to the primed substrate. After drying, the properly primed surface should have a uniform color, without streaks and discoloration. The resulting coating should be free of flaking and damage.

TOOLS AND TOOL CLEANING

Low-speed stirrer, roofing brush, paint brush.

Wash tools with water during work and wipe dry, after work wash them with water and leave to dry. If the product dries, leave it in the solvent until the dirt dissolves.

STORAGE AND TRANSPORT

The shelf life of the product is 12 months from production date. Store in dry and cool rooms (at temp. above +5°C) in tightly sealed original packaging.

NOTES

Works should be carried out in accordance with technical conditions, manufacturer's instructions, health and safety standards and regulations. For information on how to deal with symptoms of disease, allergies or irritation of the skin or eyes, please refer to the Safety Data Sheet (www.izohan.eu).

The remaining content of the product and container should be handed over to authorized companies. Please refer to the detailed conditions of use of the product before use.

GENERAL RECOMMENDATIONS

Technical data and information on the method of use are given for a temperature of 23°C ± 2°C and a relative air humidity of 55%. In other conditions, the setting (drying) time may change significantly.

The consumption of the product given in this sheet depends on the preparation of the substrate.

Do not use the product for tar materials.

Do not use the product inside rooms intended for the stay of people and the food industry.

The product in the winter version can be transported and stored at temperatures not lower than -5°C and applied at an ambient and substrate temperature not lower than 0°C. The temperature cannot drop below zero both during the application and during the drying time of the product. During cold weather, the packaging with the product should be put in a warm room for 1-2 days before use.

SAFETY INFORMATION

May cause an allergic skin reaction. Causes serious eye irritation. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wash hands and exposed parts of the body thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If skin irritation or rash occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash it before reuse. Dispose of contents/container to according to the instructions of the manufacturer or person authorized to dispose of waste.


IMPORTANT INFORMATION

Please refer to the detailed conditions of use of the product before use. We guarantee the quality of our materials as part of our terms of sale and delivery. For buildings with special requirements that are not covered by this manual, we provide our Customers with our own professional advisory service. The manufacturer has no influence on the improper use of the material, its use for other purposes or under conditions other than those described above. The guarantee only covers the quality of the delivered product. The correct and therefore effective use of the product is not subject to our control. Neither the manufacturer nor his authorized representative may be held liable for any loss incurred as a result of improper use or storage of the product.

Employees of the company are authorized to provide technical information only and solely in accordance with this technical data sheet. Information other than that contained in this sheet should be confirmed in writing. If you have any doubts, consult the manufacturer. Once we have issued a new technical data sheet, this manual is no longer valid.


DETAILS

Detail of a footing and foundation wall connection-
damp-proof waterproofing

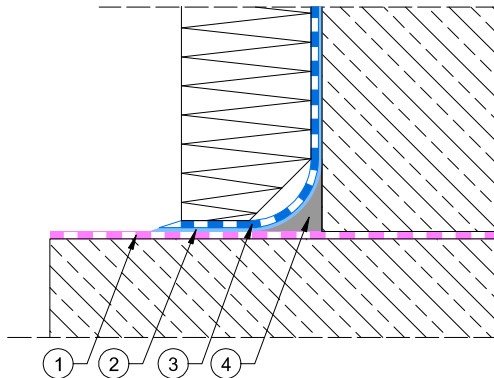

1. Horizontal insulation, e.g. IZOHAN EKO 1K
2. Priming layer of **NEXLER Dysperbit** diluted with water 1:1
3. **NEXLER Dysperbit** damp-proof insulation
4. A facet made of NEXLER RENOBUD R-103 mortar with a radius of 5 cm or made of NEXLER BITFLEX 1KP mass with a radius of 2 cm

Detail of an expansion joint

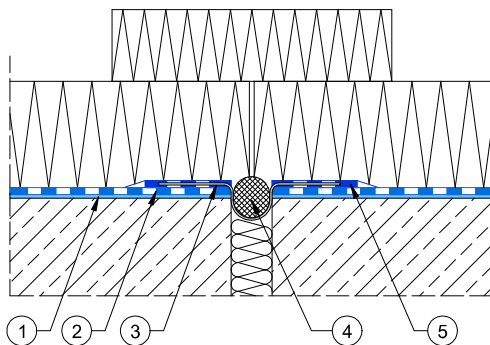

1. Priming layer of **NEXLER Dysperbit** diluted with water 1:1
2. **NEXLER Dysperbit** damp-proof insulation
3. IZOHAN sealing tape
4. IZOHAN backer rod
5. NEXLER BITFLEX 1KP sealing mass